



OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 13 TOWNSHIP 14 RANGE 4
DATE: 9-21-04
PARTY CHIEF: Wilcoxon
CREW: _____
TYPE OF MARKER: Survey mark nail over pipe
METHOD OF ESTABLISHMENT: County: 7-29-99

NOTE: This corner position represents a title corner and may not necessarily be in the position of the Record corner.

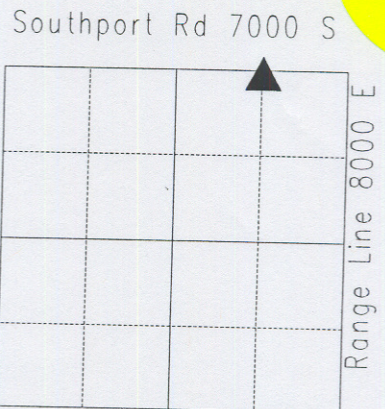

NAD'83
IN.S.P.C. E-Zone,
Name: 14041311
N: 490571.2810(m)
E: 68810.2980(m)

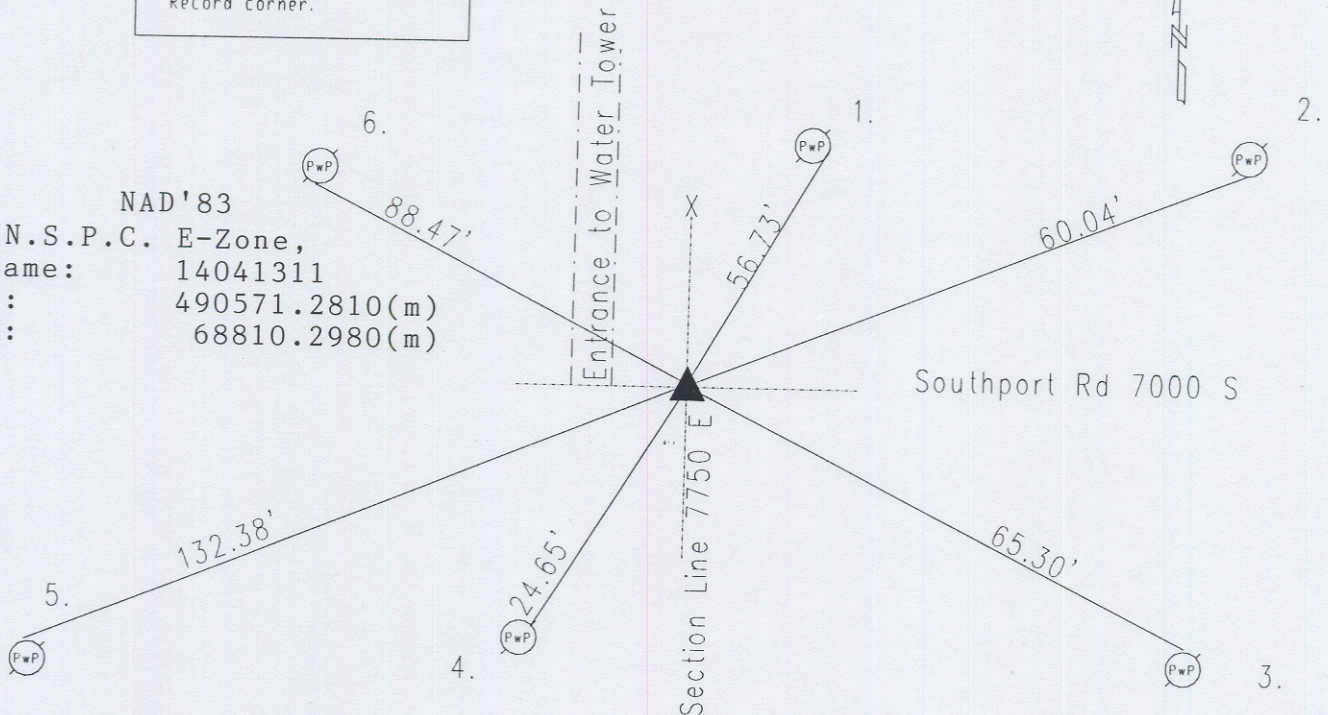

Corner was not referenced in Legal Survey of 1820 per Marion County Atlas pg.9. Hosbrook 11-27-1849 gave witness: 12" beech N 55 W 93 links. NOTE: Plat of 12-14-4 called stone this location; while plat of 13-14-4 does NOT per Franklin Township Legal Survey Book pg. 22. 9-26-51 called pipe. 7-15-75 called railroad spike. 6-11-85 called railroad spike at surface. Found over 1 1/2" pipe 8" down. Railroad spike re-set at surface. Re-tied 9-22-94 by Wilcoxon. PK nail set over pipe. Re-tied 7-29-99 by Kiste. Re-tied 9-21-04 by Wilcoxon. 14041311

REF.	DISTANCE	DESCRIPTION
1.	56.73'	Mag nail w/brass washer E PwP#182-769 3"up
2.	60.04'	Found Road nail w/washer S PwP no # 6"up
3.	65.30'	Found Road nail w/washer N PwP#31-769 12"up
4.	24.65'	Mag nail w/brass washer NE PwP #181-769 4"up
5.	132.38'	Found PK nail N PwP no# 4"up
6.	88.47'	Found PK nail S PwP#SPA 66 IBT Co. 4"up